Section 17 Town 6 Range 5

Dec 10 1842

I commenced a Survey of Section 17 & 20, T. 6, R. 5
for Weir Farnham

Legal Survey

H G Schloot as Deputy

C. B.

Chas V Miller
Surveyor Greene County.

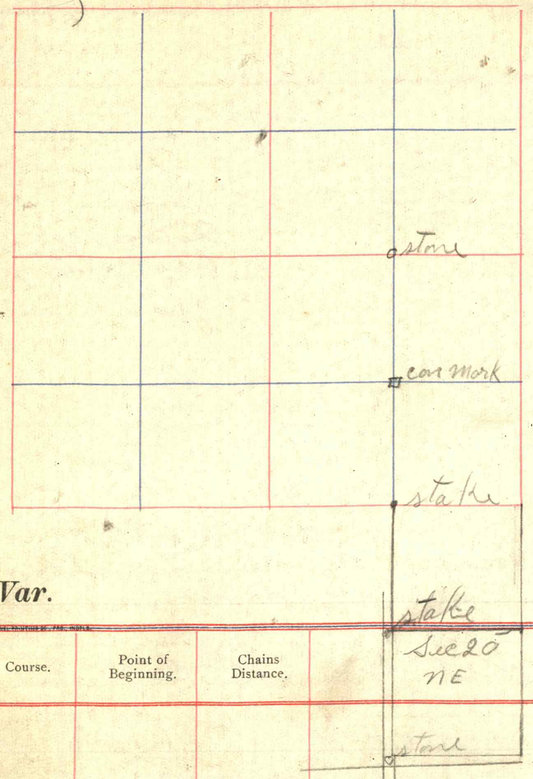

Var.

Course.	Point of Beginning.	Chains Distance.		Corrected Bearings.
North from S¼ NE Sec 20-6-5		1324	to cen¼ NE	
		2648	to N¼ NE	
West from S¼ sec 17-6-5		1307.8	to S¼ SE Sec 17-6-5	
		2615.8	to SE sec 17-6-5	
North from S¼ SE sec 17-6-5		1320	to cen SE sec 17-6-5	
		2640	to N¼ SE sec 17-6-5	

North¼ SE sec 17-6-5 stone there in river Bottom
cen SE 17-6-5 4x4 concrete Marker
36" twin maple south 3.7'
30 " " East 21'

South¼ SE sec 17-6-5 Stake
SE sec 17-6-5 Stone gone but stumps of Witness trees there
New witness 6" twin walnut north 36'
Beech SE 17.7'

S¼ NE sec 20-6-5 stone in road
cen¼ NE Sec 20-6-5 stake in road
concrete post west 15.0'

CORNER ESTABLISHED.	Monument.	Device.	WITNESS POINTS OR BEARING TREES.	Mark or Dia. in Inches.	COURSE.	Links Distant.	REMARKS.

North from S¼ NE Sec 20-6-5 — 1324 to Cen¼ NE
2648 to N¼ NE

West from S¼ Sec 17-6-5 — 1307.9 to S¼ SE - Sec 17-6-5
2615.8 to SE Sec 17-6-5

North from S¼ SE - Sec 17-6-5 — 1320 to Cen SE Sec 17-6-5
2640 to N¼ SE Sec 17-6-5

N¼ SE Sec 17-6-5 — Stone ~~near~~ in Bottoms
Cen SE 17-6-5 — 4x4 Concrete Marker
36" Twin Maple South 3.7'
30" " " East 21.0'

S¼ SE Sec 17-6-5 Stake

SE Sec 17-6-5 Stone gone but Stumps of Wit Trees here
New Wit. - Twin 6" Wal North - 36'
Beech 12" SE. - 17.7'

S¼ NE Sec 20-6-5 — Stone in Road.

Cen¼ NE Sec 20-6-5 — Stake in Road.
Concrete Mon Post - West - 15.0'